

WR series



WR-121S-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 17/09/2024



SOUND WITH SOUL

KEY FEATURES

- Weather resistant subwoofer system
- Environmental performance to level IP54
- Easy arraying with the WR-6412CX/DX
- Threaded fixing points for mounting accessories
- DX finish (direct exposure)
- Stainless steel fixing points

DESCRIPTION

The WR (Weather Resistant) Series is expanded with a compact subwoofer designed to provide extended range to the WR Series full-range cabinets. The WR-121SCX incorporates a 12 " 600 Wrms loudspeaker. The WR-121SCX offers identical enclosure dimensions to the WR-6412 for easy combination in tight packed arrays. Threaded rigging points and optional mounting hardware are available.

The WR-121S offers two exposure ratings: CX (covered exposure) for applications where cabinets are covered or protected, and DX (direct exposure) where cabinets are unprotected and directly exposed to the environment. The CX versions are protected with a thick ISO-flex polyurea coating on the exterior surface. The DX versions augment the protection rating by employing a fiberglass exterior. Stainless steel fittings and mounting hardware are offered on both versions.

WR-121S-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 17/09/2024



SOUND WITH SOUL

SPECIFICATIONS

Performance

| | |
|----------------------------|-------------------------------|
| Frequency Range (-10 dB) | 50 Hz – 125 Hz |
| Nominal Impedance | Passive: 4 ohms Biamp: 8 ohms |
| RMS Power Handling | 600 W |
| Peak Power Handling | 2400 W |
| On-axis Sensitivity 1W/1 m | 96 dB SPL |
| Maximum Peak SPL at 1 m | 130 dB |
| Recommended Amplifier | PA-1500 |

Connectors

| | |
|------------------------|---------------------------------|
| Audio Input Connector | Covered Barrier Strip Terminals |
| Audio Output Connector | Covered Barrier Strip Terminals |

Enclosure

| | |
|--------------------------|---|
| Enclosure Construction | Birch Plywood |
| Enclosure Geometry | Rectangular |
| Rigging | M10 Rigging Points |
| Finish | ISO-flex Paint |
| Color | Black |
| IP Rating | IP54 |
| Depth | 395 mm (15,6 in) |
| Dimensions (H x W x D) | 705 x 395 x 395 mm 27,8 x 15,6 x 15,6 in |
| Net Weight | 24,0 kg (52,9 lb) |

WR-121S-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 17/09/2024



SOUND WITH SOUL


Components

| | |
|-----------|------|
| LF Driver | 12GX |
|-----------|------|

Shipping

| | |
|---------------------------------|---|
| Carton Dimensions (H x W x D) | 800 x 490 x 470 mm 31,5 x 19,3 x 18,5 in |
| Shipping Weight | 32,0 kg (70,4 lb) |

DIMENSIONS

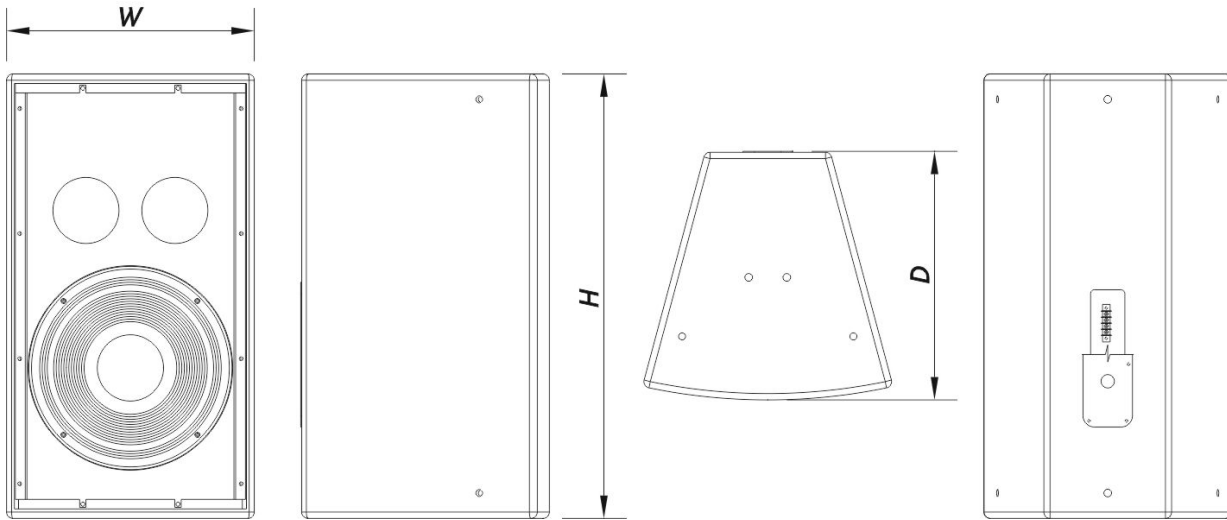

ORDERING INFORMATION

| Model | Description | P/N |
|-------|-------------|-----|
|-------|-------------|-----|

System

| | | |
|------------|--|----------|
| WR-121S-CX | | 10428232 |
|------------|--|----------|

Replacement Parts

WR-121S-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 17/09/2024



| | | |
|---------|------------|----------|
| 12GX | Transducer | 20208950 |
| GM-12GX | Recone Kit | 20208065 |

Accessories

| | | |
|------------|------------------------------|----------|
| ANL-2 | Rigging Accessories | 10101020 |
| AX-SPG1 | Installation & Stacking Acc. | 10105050 |
| AXC-AT | Installation & Stacking Acc. | 10104310 |
| AXF-X12 | Installation & Stacking Acc. | 10104831 |
| AXU-WR6412 | Installation & Stacking Acc. | 10104710 |

WR-121S-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 17/09/2024



SOUND WITH SOUL