Altea⁴⁰⁰



ALTEA-408-WR-T100

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988 Fuente del Jarro - Valencia - Spain - Tel. +34961340860 Updated (DD/MM/YYYY): 31/07/2024



KEY FEATURES

- · 2-way, full range system
- · 8" bass loudspeaker
- · 1" compression driver
- · Angled enclosure design for stage monitor use
- · Built-in rigging points
- · Stand mountable

DESCRIPTION

ALTEA-408 is a passive system, primarily designed for installation applications, offering the flexibility to choose from a range of external DSP and amplification options within the Integral Series. By opting for the advanced electronic solutions within the Integral Series, users can enjoy the same exceptional features and sound quality as the self-powered version, ensuring a consistent and reliable audio experience across the entire range.

The ALTEA-408 features an 8" transducer with a 2" voice coil, delivering accurate bass reproduction and outstanding musicality. High frequencies are expertly managed by a 1" voice coil compression driver, providing exceptional performance. With a horn coverage of 90° x 90°, this combination of components ensures wide and even sound dispersion, making it ideal for music reproduction.

The ALTEA-408-WR-T100 is a versatile variant that combines the weatherproofing features of the ALTEA-408-WR with the transformer capabilities of the ALTEA-408-T. Designed for outdoor and harsh environments, it incorporates enhanced components such as an INOX grille and screws, a triple-layer grille protection system and a protective cover for the speakON cable. In addition, it incorporates a high-quality integrated transformer for seamless integration with 100 V distributed audio systems commonly used in commercial installations. This combination of weather resistance and transformer functionality makes the ALTEA-408-WR-T100 a highly adaptable and reliable option for a variety of installation scenarios, offering uncompromising audio quality in a variety of conditions.





SPECIFICATIONS

Performance


70 Hz - 20 kHz	
90°	
90°	
12.5 W - 25 W - 50 W - 100W	
25 W - 50 W - 100W	
150 W	
600 W	
94 dB SPL	
122 dB	
INTEGRAL-A402	
INTEGRAL-A1002	
INTEGRAL-A1004	
Covered Barrier Strip Terminals	
Covered Barrier Strip Terminals	
Polypropylene	
Trapezoidal	
M8 Rigging Points	
Black	
260 mm (10,2 in)	





Dimensions (H x W x D)	480 x 280 x 260 mm 18,9 x 11,0 x 10,2 in
Net Weight	8,5 kg (18,7 lb)
Components	
LF Driver	8GV
HF Driver	M-32
Shipping	
Shipping Weight	12,0 kg (26,5 lb)

DIMENSIONS

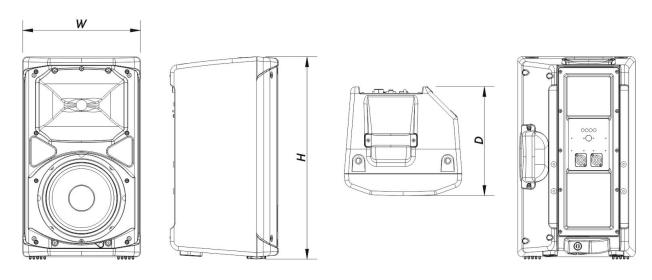

ORDERING
INFORMATION

Model	Description	P/N
System		
ALTEA-408-WR-T100		10404994



Replacement Parts

8GV	Cone Transducer	20208984
M-32	Compression Driver	20208970
TC-ALT408	Filter	20150100
Accessories		
ANL-1	Rigging Accessories	10101010
ANL-1	Installation & Stacking Acc.	10101010
AX-112-5	Installation & Stacking Acc.	10102390
AXW-ALT-WR	Installation & Stacking Acc.	10102392
TRD-6	Installation & Stacking Acc.	10104470
TRD-7	Installation & Stacking Acc.	10104471
TRPD-S2-PAK	Installation & Stacking Acc.	10104011

