

# road series



## ROAD-15ART-NET115

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 23/01/2025



SOUND WITH SOUL

## KEY FEATURES

- 2-way powered stage monitor system
- Two channel Class D amplifier 550 W LF + 220 W HF
- 15" loudspeaker with 3" voice coil"
- M-75 compression driver
- Low-profile design for minimum visual impact
- Hidden connector panel and LEDS
- Two side located handles-Heavy duty ISO-flex paint finish
- Right and left hand versions (Road 15AR.net/Road 15AL.net)
- Remote monitoring and control via DASnet™

## DESCRIPTION

The ROAD-15ART is a powered stage monitor that incorporates a 15R4 cone loudspeaker for bass reproduction. High frequencies are handled by an M-75 compression driver with 1.5" exit, a 3" titanium diaphragm and EFW voice coil.

The biamplified system uses a 3G Class "D" amplifier with 550 W powering the low frequency section and a 220 W powers the highs. The montior's compact dimensions, attractive design and standard pole mount socket make it ideal for use as a pole mountable multi-purpose system.

Remote monitoring and control is provided by way of DASnet™, the audio management application for DAS powered cabinets and processors which offers users instant and intuitive view of the system status as well as control over a range of parameters of a single cabinet or a network of them.

# ROAD-15ART-NET115

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 23/01/2025



SOUND WITH SOUL

## SPECIFICATIONS

### Performance

Frequency Range (-10 dB)	47 Hz - 23 kHz
Horizontal Coverage (-6 dB)	40°
Vertical Coverage	60°
Maximum Peak SPL at 1 m	134 dB

### Electronics and Connectors

Nominal Amplifier Power LF (continuous)	550 W
Nominal Amplifier Power LF (peak)	1100 W
Nominal Amplifier Power HF (continuous)	220 W
Nominal Amplifier Power HF (peak)	440 W
Input Type	Balanced
Input Impedance	20 kohms
Input Sensitivity	1.55 V (+6 dBu)
Audio Signal Loop Thru Connector	1 x Male XLR
Audio/Data Input Connector	etherCON
Control	DASnet™
Audio + Data Loop Thru Connector	etherCON
AC Output Connector	powerCON TRUE1
Current Draw 230 V / 115 V	-/3.4 A

### Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal

# ROAD-15ART-NET115

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 23/01/2025




Finish	ISO-flex Paint
Color	Black
Dimensions ( H x W x D )	375 x 745 x 535 mm 14,8 x 29,3 x 21,1 in
Net Weight	30,5 kg ( 67,3 lb )

### Shipping

Carton Dimensions ( H x W x D )	818 x 415 x 530 mm 32,2 x 16,3 x 20,9 in
Shipping Weight	33,5 kg ( 74,0 lb )

### DIMENSIONS

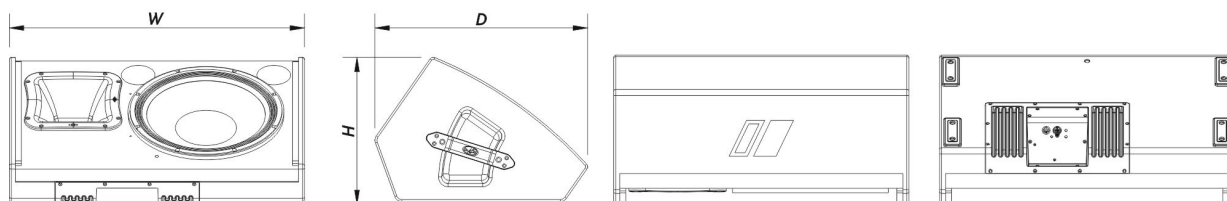

### ORDERING INFORMATION

Model	Description	P/N
<b>System</b>		
ROAD-15ART-NET115		10418750

# ROAD-15ART-NET115

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 23/01/2025



SOUND WITH SOUL