


# HQ series



## HQ-112.64-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 11/10/2024

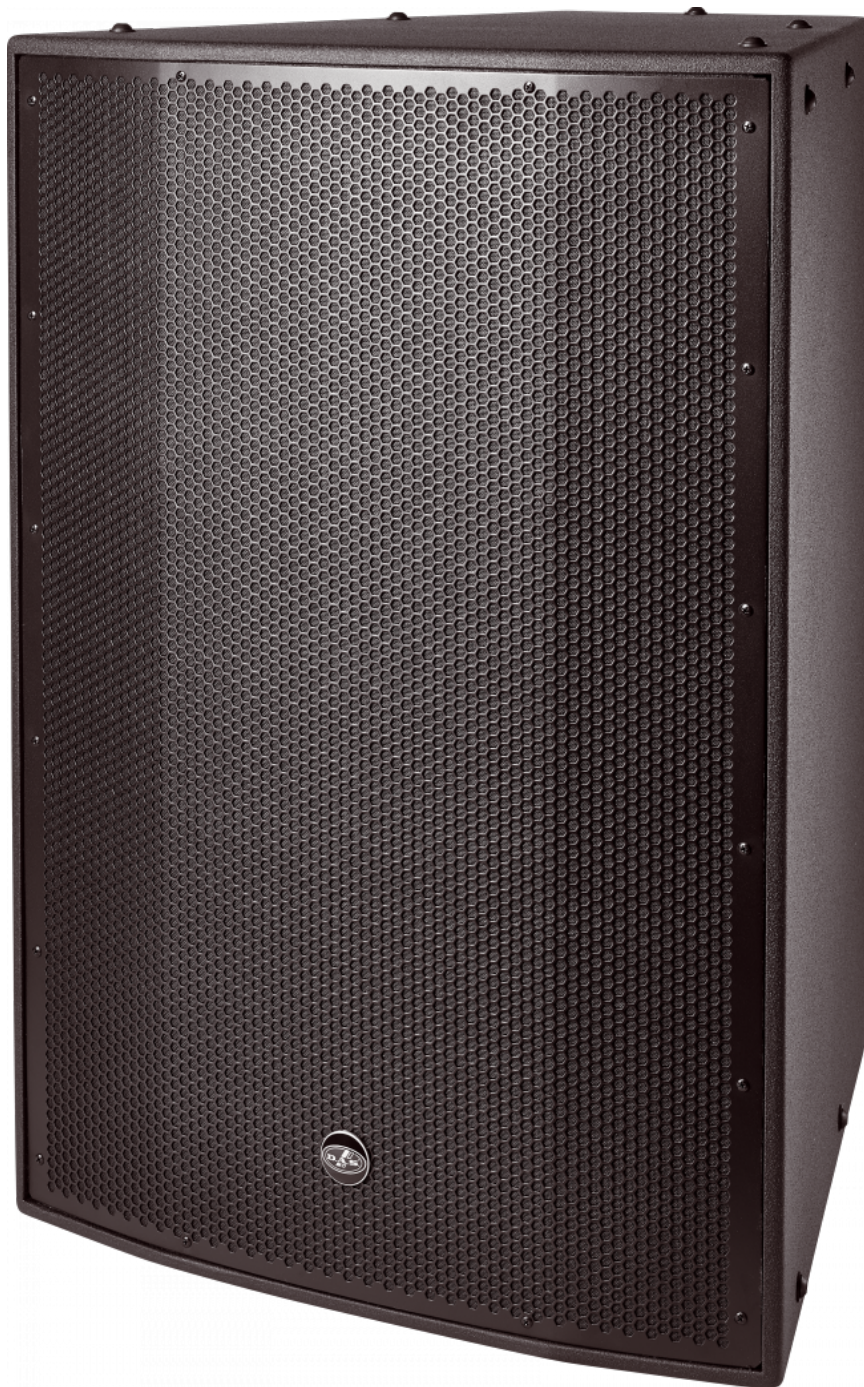

SOUND WITH SOUL

## KEY FEATURES

- Two-way long-throw system
- CX finish (ISO-flex) for covered exposure
- Horn loaded 12" low frequency loudspeaker
- M-78N neodymium compression driver
- Selectable passive/bi-amplified operating modes
- Tight 60° x 40° coverage angles
- Rotatable horns
- Stainless steel rigging kit

## DESCRIPTION

The HQ-112.64 is offered in two exposure ratings-“covered exposure” (CX) for applications where cabinets are covered or protected, and “direct exposure” (DX) where cabinets are unprotected and directly exposed to the environment. The CX versions are protected with a thick ISO-flex coating on both the exterior and interior surfaces. The DX versions augment the protection rating by employing a fiberglass exterior and a gel coat sealed interior. Both versions are rated IP54.

# HQ-112.64-CX

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 11/10/2024



SOUND WITH SOUL

## SPECIFICATIONS

### Performance

Frequency Range (-10 dB)	80 Hz – 18 kHz
Horizontal Coverage (-6 dB)	60°
Vertical Coverage	40°
Nominal Impedance	8 ohms
Nominal Impedance MF	8 ohms
Nominal Impedance HF	8 ohms
RMS Power Handling	400 W
RMS Power Handling HF	150 W
RMS Power Handling MF	400 W
Peak Power Handling	1600 W
Peak Power Handling MF	1600 W
Peak Power Handling HF	400 W
On-axis Sensitivity 1W/1 m	Passive: 110 dB SPL
On-axis Sensitivity 1W/1 m MF	110 dB SPL
On-axis Sensitivity 1W/1 m HF	110 dB SPL
Maximum Peak SPL at 1 m	Passive: 142 dB
Maximum Peak SPL at 1 m MF	142 dB
Maximum Peak SPL at 1 m HF	138 dB
Recommended Amplifier	DX-100I-230 DX-100I-115 DX-80I-230 DX-80I-115

# HQ-112.64-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 11/10/2024



SOUND WITH SOUL

	INTEGRAL-M88
Recommended Processor	INTEGRAL-MA1604
	INTEGRAL-MA1004

---

### Connectors

Audio Input Connector	1 x speakON NL4 Covered Barrier Strip Terminals
Audio Output Connector	1 x speakON NL4 Covered Barrier Strip Terminals

---

### Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal
Rigging	M10 Rigging Points
Finish	Fiberglass
Color	Black
Depth	605 mm (24,0 in)
Dimensions ( H x W x D )	990 x 685 x 605 mm 39,0 x 27,0 x 24,0 in
Net Weight	56,0 kg ( 123,5 lb )

---

### Components

LF Driver	12HQN
HF Driver	M-78N
Horn/Waveguide	BCH-6040-7037 BCM-7545-7037

---

# HQ-112.64-CX


DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
 Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
 Updated (DD/MM/YYYY): 11/10/2024



## Shipping

Carton Dimensions ( H x W x D )	1.070 x 650 x 745 mm 42,1 x 25,6 x 29,3 in
Shipping Weight	60,5 kg ( 133,4 lb )

## DIMENSIONS

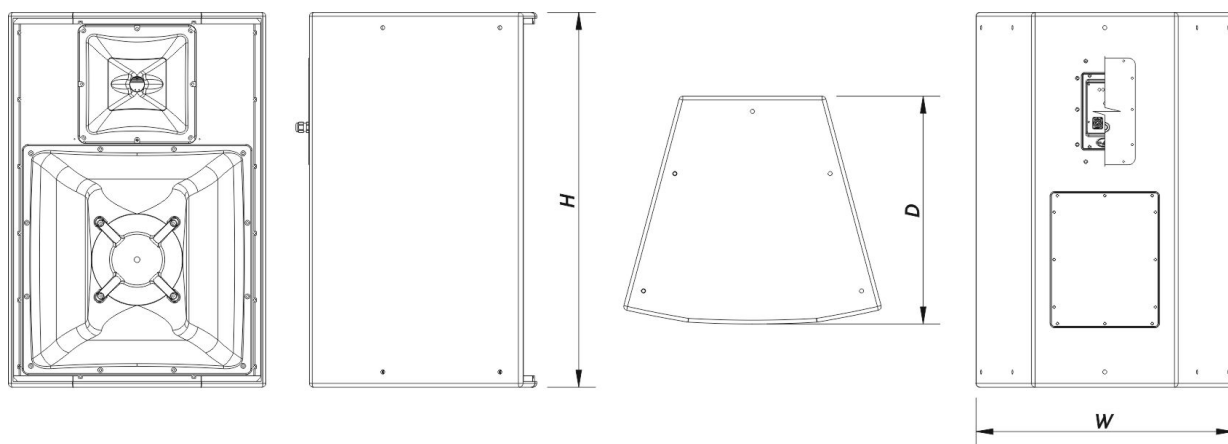

## ORDERING INFORMATION

Model	Description	P/N
-------	-------------	-----

### System

HQ-112.64-CX		10432090
--------------	--	----------

### Replacement Parts

12HQN	Cone Transducer	20208890
BCH-6040-7037	Horn	30006307
BCM-7545-7037	Horn	30006311
F-HQ112.64.95	Filter	30009041

# HQ-112.64-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 11/10/2024



SOUND WITH SOUL

GM-12HQ	Recone Kit	20208536
GM-M75N	Diaphragm	20205080
M-78N	Compression Driver	20208860

### **Accessories**

ANL-2	Rigging Accessories	10101020
AX-HQ-X12	Rigging Accessories	10107001
JP-HQ-112	Rigging Accessories	10107003
UFB	Rigging Accessories	10105040

# HQ-112.64-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 11/10/2024



SOUND WITH SOUL