# **DECO** series







#### **KEY FEATURES**

- · 2-way 8" Coaxial High-Performance Ceiling System.
- · Full-range speaker: 70 Hz 20 kHz.
- · Multi-tap transformer 8 ohm & 70V/100V.
- · Quick Install: Auto-locking tabs for secure, hands-free mounting.
- · Easy Access: Front selector for hassle-free power adjustments.
- · PK-80T accessory for versatile pendant mounting, available in white or black
- · Frameless grille design, available in white or black.

#### **DESCRIPTION**

The DECO-80-T is an advanced ceiling speaker system designed for top-tier audio performance and seamless aesthetic integration. Featuring a sturdy steel enclosure and a durable polypropylene front, it provides 110° conical coverage. Engineered for adaptability, it is equipped with a 4-way Phoenix connector for easy in and out link connections. The DECO-80-T operates at 8-ohm nominal impedance or in a 100V line system, with tap settings of 15W, 30W, and 60W accessible at the front. With an RMS power handling of 125W and a peak power of 500W, and a maximum peak SPL of 121 dB, it delivers robust and clear sound.

Its compact design, with a cut-out diameter of 290 mm (II.4 in), allows straightforward installation in various ceiling environments. Measuring 321 x 321 x 220 mm and weighing 5.8 kg (I2.8 lb), it strikes a balance between size, power, and aesthetic discretion. The PK-80T accessory transforms it into a pendant speaker for greater placement flexibility and sound direction, especially beneficial in open architecture spaces or areas where traditional ceiling mounting is not optimal. Available in black and white finishes, the DECO series seamlessly matches any interior design.

For optimal performance, pair the DECO-80-T with the INTEGRAL-A1002 or INTEGRAL-A1604 amplifiers. Using the Integral Matrix and processors, fully compatible with ALMA™, enhances the speakers' capabilities through custom presets and comprehensive monitoring and control, ensuring effortless system management and maximum audio quality.

The modeling data for DECO-40-T / DECO-40-LP / DECO-65-T / DECO-80-T / DECO-80-T are valid for EASE Focus, EASE Evac, and EASE Address.



### **SPECIFICATIONS**

#### Performance

Frequency Range (-10 dB)	55 Hz – 20 kHz	
Nominal Impedance	8 ohms	
Conical Coverage	110°	
Transformer Taps 70 V	8 Ω / 7.5 W / 15 W / 30 W	
Transformer Taps 100 V	8 Ω/15 W/30 W/60 W	
RMS Power Handling	125 W	
Peak Power Handling	500 W	
On-axis Sensitivity 1W/1 m	94 dB SPL	
Maximum Peak SPL at 1 m	121 dB	
	INTEGRAL-A402	
December of all Association	INTEGRAL-A404	
	INTEGRAL-A1002	
	INTEGRAL-A1004	
Recommended Amplifier	INTEGRAL-A1602	
	INTEGRAL-A1604	
	INTEGRAL-MA1004	
	INTEGRAL-MA1604	
Recommended Processor	INTEGRAL-M88	
	INTEGRAL-MA1604	
	INTEGRAL-MA1004	
	INTEGRAL-M26X	
Connectors		
Audio Input Connector	4-way Phoenix 3.8 mm	


Audio Input Connector	4-way Phoenix 3.8 mm
,	3



#### **Enclosure**

Enclosure Construction	Steel	
Enclosure Geometry	Round	
Cut Out Diameter	290 mm (11,4 in)	
Depth	220 mm (8,7 in)	
Dimensions ( H x W x D )	321 x 321 x 220 mm 12,6 x 12,6 x 8,7 in	
Net Weight	5,8 kg (12,8 lb )	
Components		
MF Driver	8GV	

### **DIMENSIONS**

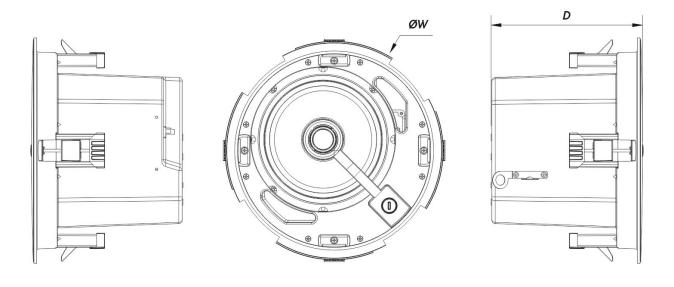

ORDERING Model Description P/N



### **INFORMATION**

### **System**

DECO-80-T		10213240
Replacement Parts		
8GV	Cone Transducer	20208984
Accessories		
KIT-IP-DECO	Installation & Stacking Acc.	20301010
PK-80T	Installation & Stacking Acc.	10213420
PK-80TW	Installation & Stacking Acc.	10213450
SP-PRE-DECO-80T	Installation & Stacking Acc.	10213302

