


HQ series



HQ-112.43-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 11/10/2024

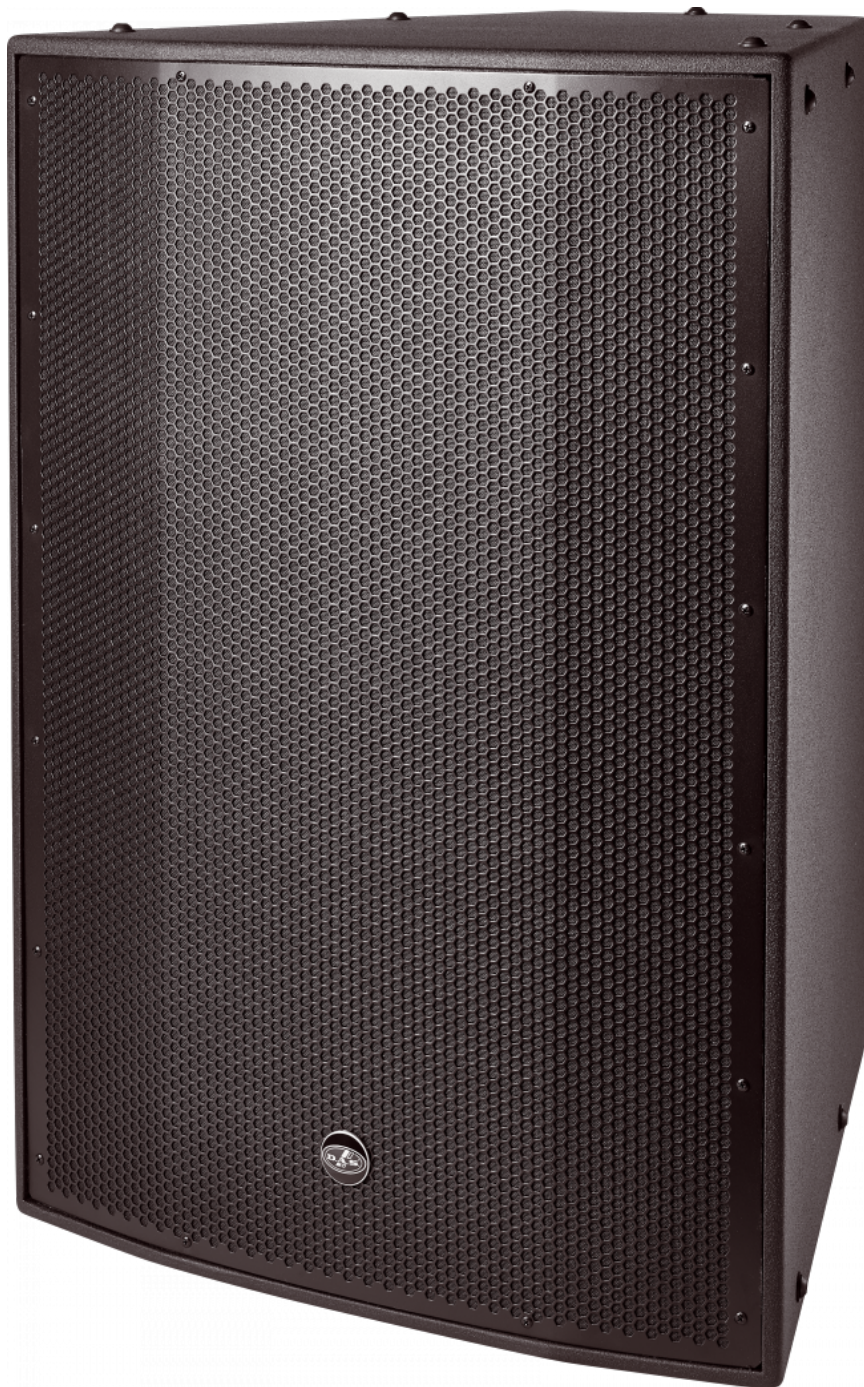

SOUND WITH SOUL

KEY FEATURES

- Two-way long-throw system
- Horn loaded 12" low frequency loudspeaker
- CX finish (ISO-flex) for covered exposure
- M-78N neodymium compression driver
- Selectable passive/bi-amplified operating modes
- Tight 40° x 30° coverage angles
- Rotatable horns
- Stainless steel rigging kit

DESCRIPTION

The HQ-112.43 is offered in two exposure ratings-“covered exposure” (CX) for applications where cabinets are covered or protected, and “direct exposure” (DX) where cabinets are unprotected and directly exposed to the environment. The CX versions are protected with a thick ISO-flex coating on both the exterior and interior surfaces. The DX versions augment the protection rating by employing a fiberglass exterior and a gel coat sealed interior. Both versions are rated IP54.

HQ-112.43-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 11/10/2024



SOUND WITH SOUL

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	80 Hz – 18 kHz
Horizontal Coverage (-6 dB)	40°
Vertical Coverage	30°
Nominal Impedance	Passive: 8 ohms
Nominal Impedance MF	8 ohms
Nominal Impedance HF	8 ohms
RMS Power Handling	Passive: 400 W
RMS Power Handling HF	150 W
RMS Power Handling MF	400 W
Peak Power Handling	Passive: 1600 W
Peak Power Handling MF	1600 W
Peak Power Handling HF	400 W
On-axis Sensitivity 1W/1 m	Passive: 111 dB SPL
On-axis Sensitivity 1W/1 m MF	111 dB SPL
On-axis Sensitivity 1W/1 m HF	112 dB SPL
Maximum Peak SPL at 1 m	Passive: 143 dB
Maximum Peak SPL at 1 m MF	143 dB
Maximum Peak SPL at 1 m HF	140 dB
Recommended Amplifier	DX-100I-230 DX-100I-115 DX-80I-230 DX-80I-115

HQ-112.43-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 11/10/2024



SOUND WITH SOUL

	INTEGRAL-M88
Recommended Processor	INTEGRAL-MA1604
	INTEGRAL-MA1004

Connectors

Audio Input Connector	1 x speakON NL4 Covered Barrier Strip Terminals
Audio Output Connector	1 x speakON NL4 Covered Barrier Strip Terminals

Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal
Rigging	M10 Rigging Points
Finish	Fiberglass
Color	Black
Depth	720 mm (28,4 in)
Dimensions (H x W x D)	990 x 685 x 720 mm 39,0 x 27,0 x 28,4 in
Net Weight	62,5 kg (137,8 lb)

Components

LF Driver	12HQN
HF Driver	M-78N
Horn/Waveguide	BCH-4030-7037 BCM-4030-7037

HQ-112.43-CX


DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
 Fuente del Jarro - Valencia - Spain - Tel. +34961340860
 Updated (DD/MM/YYYY): 11/10/2024



Shipping

Carton Dimensions (H x W x D)	1.070 x 650 x 745 mm 42,1 x 25,6 x 29,3 in
Shipping Weight	67,5 kg (148,8 lb)

DIMENSIONS

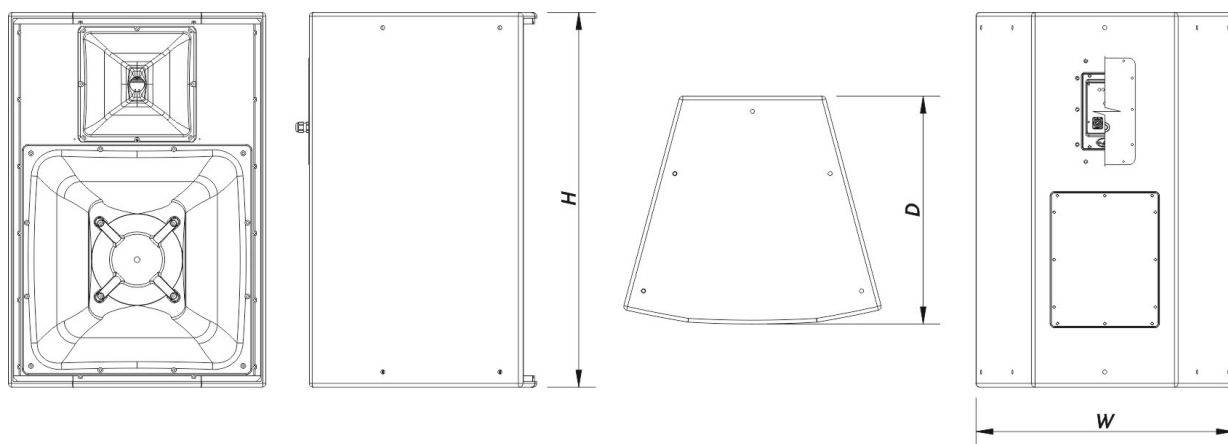

ORDERING INFORMATION

Model	Description	P/N
-------	-------------	-----

System

HQ-112.43-CX		10432080
--------------	--	----------

Replacement Parts

12HQN	Cone Transducer	20208890
BCH-4030-7037	Horn	30006309
BCM-4030-7037	Horn	30006310
F-HQ112.43	Filter	30006506

HQ-112.43-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 11/10/2024



SOUND WITH SOUL

GM-12HQ	Recone Kit	20208536
GM-M75N	Diaphragm	20205080
M-78N	Compression Driver	20208860

Accessories

ANL-2	Rigging Accessories	10101020
AX-HQ-X12	Rigging Accessories	10107001
JP-HQ-112	Rigging Accessories	10107003
UFB	Rigging Accessories	10105040

HQ-112.43-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 11/10/2024



SOUND WITH SOUL